


OV Truss OV40

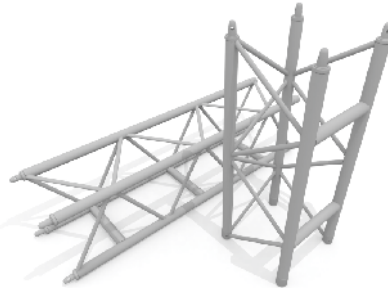

The OV range represents an innovative engineering solution to a common size of truss for the entertainment, event and presentation industry.

Designed to the latest Eurocodes, combines high comparative load capacities, low self-weight, and comes at a competitive price. All this whilst analysing the most common slinging / support methods on the truss has determined an 'engineered' product that can utilise the most modern manufacturing techniques.

The OV range is a series of square and triangular truss systems using conical connectors for a quick fixing method. Brace patterns are specifically designed to withstand the loads and forces implied by all common slinging and support methods. The extrusions used in the construction of the trusses are bespoke to Total Solutions Group and have been rigorously designed to enhance the structural effectiveness of the trusses and also to speed up manufacturing.

OV Truss OV40




Load Tables

Span (metres)	3	6	9	12	15	18
UDL kg	2160	2140	1450	1050	800	630
DEFL mm	2	19	44	75	112	152
CPL kg	1220	1120	730	530	400	310
DEFL mm	2	16	35	60	90	122
TPL kg	1450	1430	1090	790	600	470
DEFL mm	2	17	45	77	115	155
QPL kg	1380	1360	1090	790	600	470
DEFL mm	2	15	42	71	106	144

Span (metres)		
Cantilever Span		3
UDL	kg	660
DEFL	mm	8
EPL	kg	540
DEFL	mm	14
CPL	kg	660
DEFL	mm	5.8


Uniform Load (UDL)



Point Load (Edge)



Point Load (Central)



OV Truss OV40



- All loads are given in kilograms and are total safe working loads (unfactored) at node points of a chord members only.
- Allowance has been made for self-weight of the truss
- Allowance has been made for frequent use factor of 85%
- The payload on a truss has been calculated as a permanent action. Should it be necessary to consider the payload as a variable action, the tabulated figures should be reduced to 90% of the given values
- No allowance for dynamic loading has been made
- Capacity has been calculated in accordance with BS EN 1999 – Design of Aluminium Structures
- All loads applied are symmetrical between bottom 2 chords
- All deflections stated are theoretical deflections which do not account for any connection slippage. As such the values stated in these tables will be less than the actual deflection of the truss.
- Care must be taken regarding the support condition of the truss, Figure 1 shows the acceptable supporting conditions and figures 2 to 4 show the support condition that should not be used.

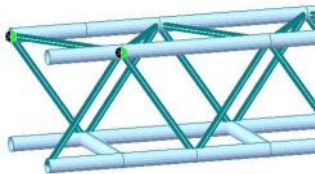


Figure 1: Orientation of the truss supported off top chords

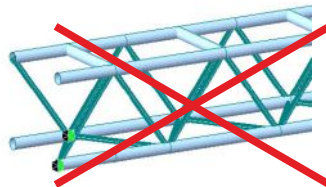


Figure 2: Not allowed orientation of the truss supported off bottom chords

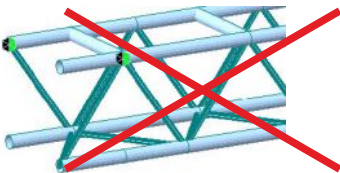


Figure 3: Not allowed orientation of the truss supported off top chords

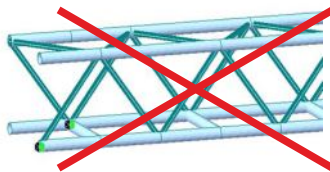


Figure 4: Not allowed orientation of the truss supported off bottom chords

OV Truss OV40



Material Specifications

Main Chord:	48.3 x 3mm
Braces:	Special Extrusion
Material Specifications:	EN AW-6082 T6
Fixings:	Conical : TFC pins & R3 Clips

Accessories

Circles
Hinges and Swivels
Bespoke Lengths
Ladder Sections

Item Codes, Weights and Dimensions

OV40-025	'OV' Truss, 40cm Squ, 0.25Mt section	250mm x 400mm x 400mm	3.4kg
OV40-050	'OV' Truss, 40cm Squ, 0.5Mt section	500mm x 400mm x 400mm	4.7kg
OV40-100	'OV' Truss, 40cm Squ, 1.0Mt section	1000mm x 400mm x 400mm	8.0kg
OV40-200	'OV' Truss, 40cm Squ, 2.0Mt section	2000mm x 400mm x 400mm	14.7kg
OV40-300	'OV' Truss, 40cm Squ, 3.0Mt section	3000mm x 400mm x 400mm	21.4kg
OV40-400	'OV' Truss, 40cm Squ, 4.0Mt section	4000mm x 400mm x 400mm	23.3kg
OV40-4W	'OV' Truss, 40cm Squ, 4way corner	600mm x 600mm x 400mm	10.6kg
OV40-CB	'OV' Truss, 40cm Squ, Basic Universal Corner Block	400mm x 400mm x 400mm	11.5kg
OV30-FC100	'OV' Truss, Female bolt-on Connector - 100mm	100mm x 48mm x 48mm	0.4kg
OV30-MC100	'OV' Truss, Male bolt-on Connector - 100mm	100mm x 48mm x 48mm	0.6kg
OV40-BP	'OV' Truss, 40cm Squ, Ali Base plate, 50cm Squ - No conns	600mm x 600mm x 8mm	5kg
OV40-TPB	'OV' Truss, 40cm Truss Pickup Beam - 1000Kgs	422mm x 170mm x 65mm	5.2kg

Design Specification

Manufactured in accordance with



BS EN 1090-3:2008 : Technical Requirements for aluminium structures

EN ISO 9001:2015 : Quality management systems

BS EN 1999 Pt 1-1 : Design of Aluminium Structures, General structural rules

EN17115: Entertainment Technology : Specifications for design, manufacture of aluminium and steel trusses and towers

OV Truss
OV40

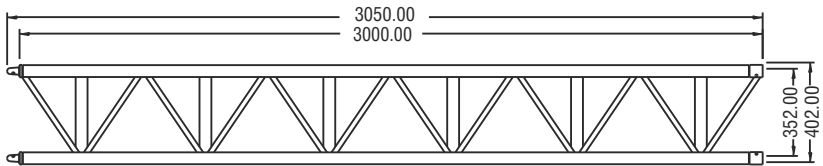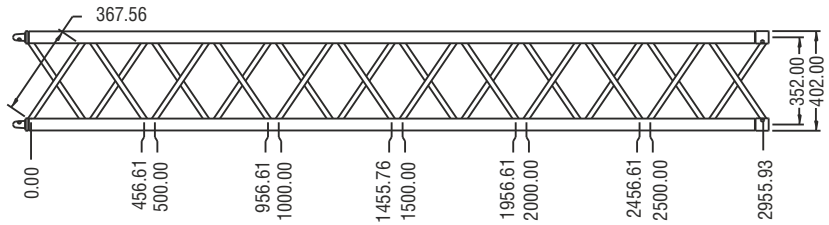

PIN INSERTION
DIRECTION

